

GOLD access using TinyTERM Enterprise for iPad

NOTE: There are several versions of TinyTERM for the iPad.

This document relates to TinyTERM Enterprise. TinyTERM Enterprise will need to be purchased from the Apple App Store.

Description

This document describes the settings to apply to TinyTERM Enterprise on the iPad to correctly configure Classic Gold for access within your wireless network; not over 3G. Configuration is based on iOS8.

Download TinyTERM Enterprise from the Apple App Store:

Keyboard Layout Installation

Make sure that TinyTERM ENTERPRISE is not running on the device.

Double-tap the home button to see the list of running apps. Swipe TinyTERM up off the screen to close it.

Email the keyboard layout file to the iPad, send the keyboard layout file as an attachment. Tap the attachment from the email and select "Open with TinyTERM Enterprise".

You will get a blue TinyTERM screen, at this point you **must** fully close it again: Double-tap the home button to see the list of running apps. Swipe TinyTERM up off the screen to close it.

Restart TinyTERM Enterprise and enter the following configuration. An example screen shot can be found below.



Configuration Settings

Name : Gold
Host : [<GOLD SERVER IP GOES HERE>]
(Find this at the top of an existing Classic Gold session. E.g. **192.168.1.200**)
Port : 23
Protocol : Telnet

Connection Settings

Emulation : SCOANSI
Terminal Type String : xterm
Backspace sends delete : OFF
Scan Send CR : ON
Code Page : STD 866 PC Cyrillic
UTF8 Decoding : OFF
Ignore Graphics Parity : ON

Portrait Settings → Keyboard Shown

Rows : 25
Columns : 80


Portrait Settings → Keyboard Hidden


Resize When Hidden : OFF
Rows : 40
Columns : 80


Portrait Settings → Keyboard Settings

Layout : GOLD
Transparent Keys : OFF

Configuration Settings

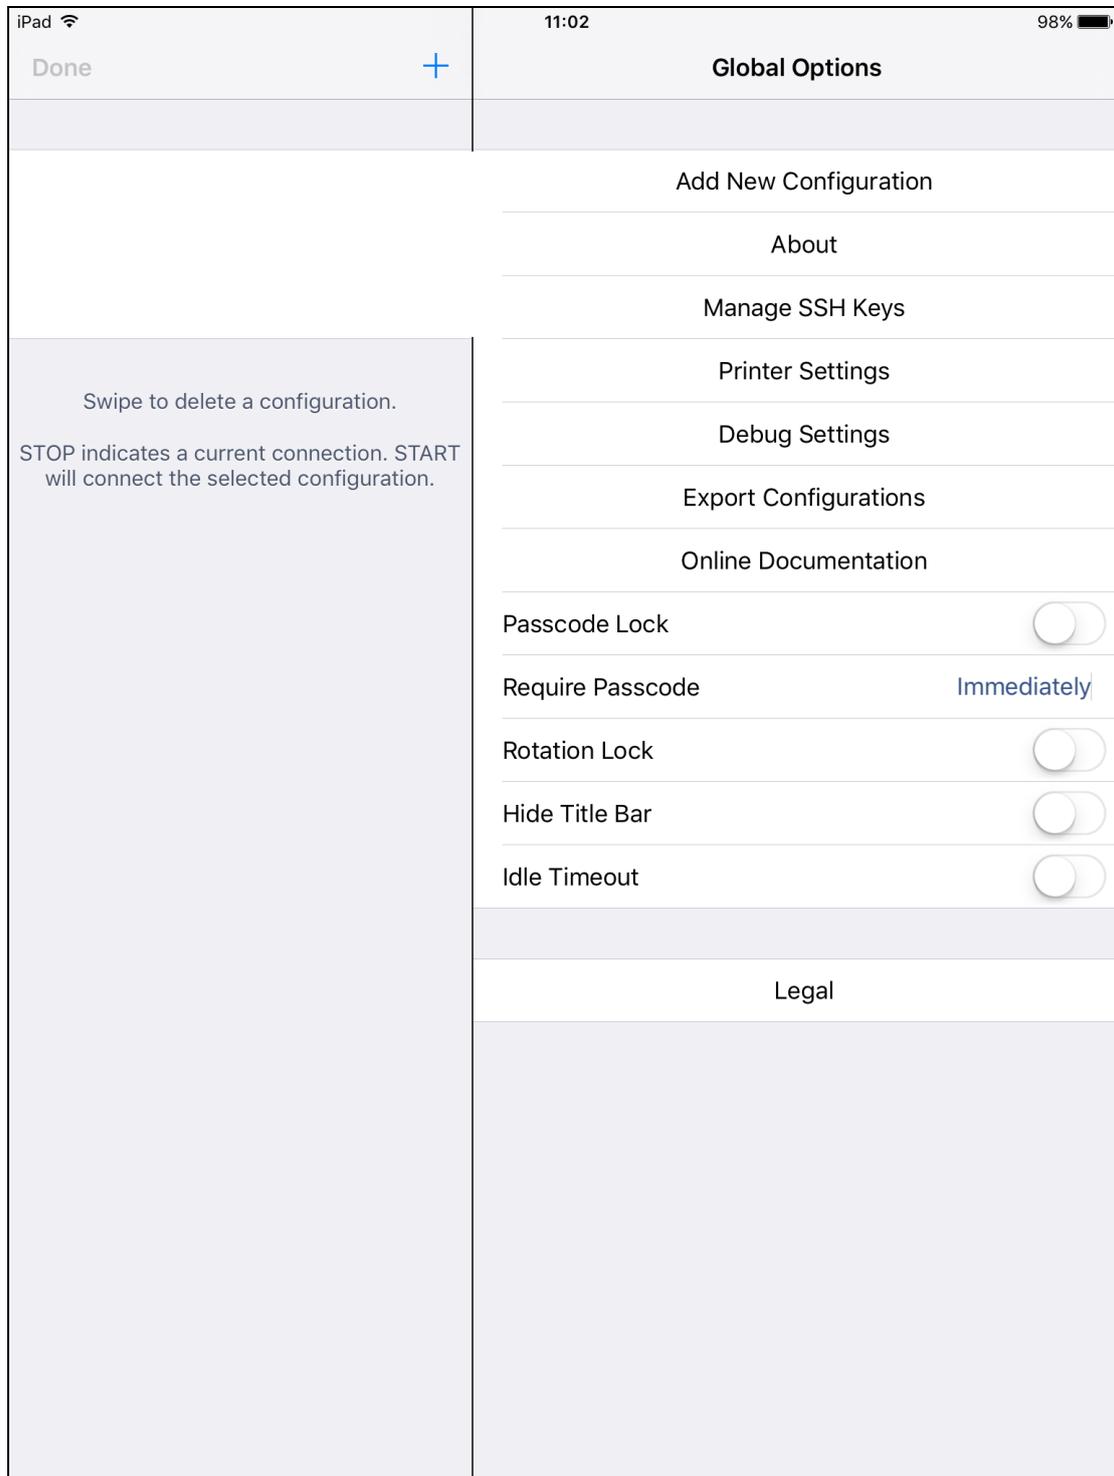

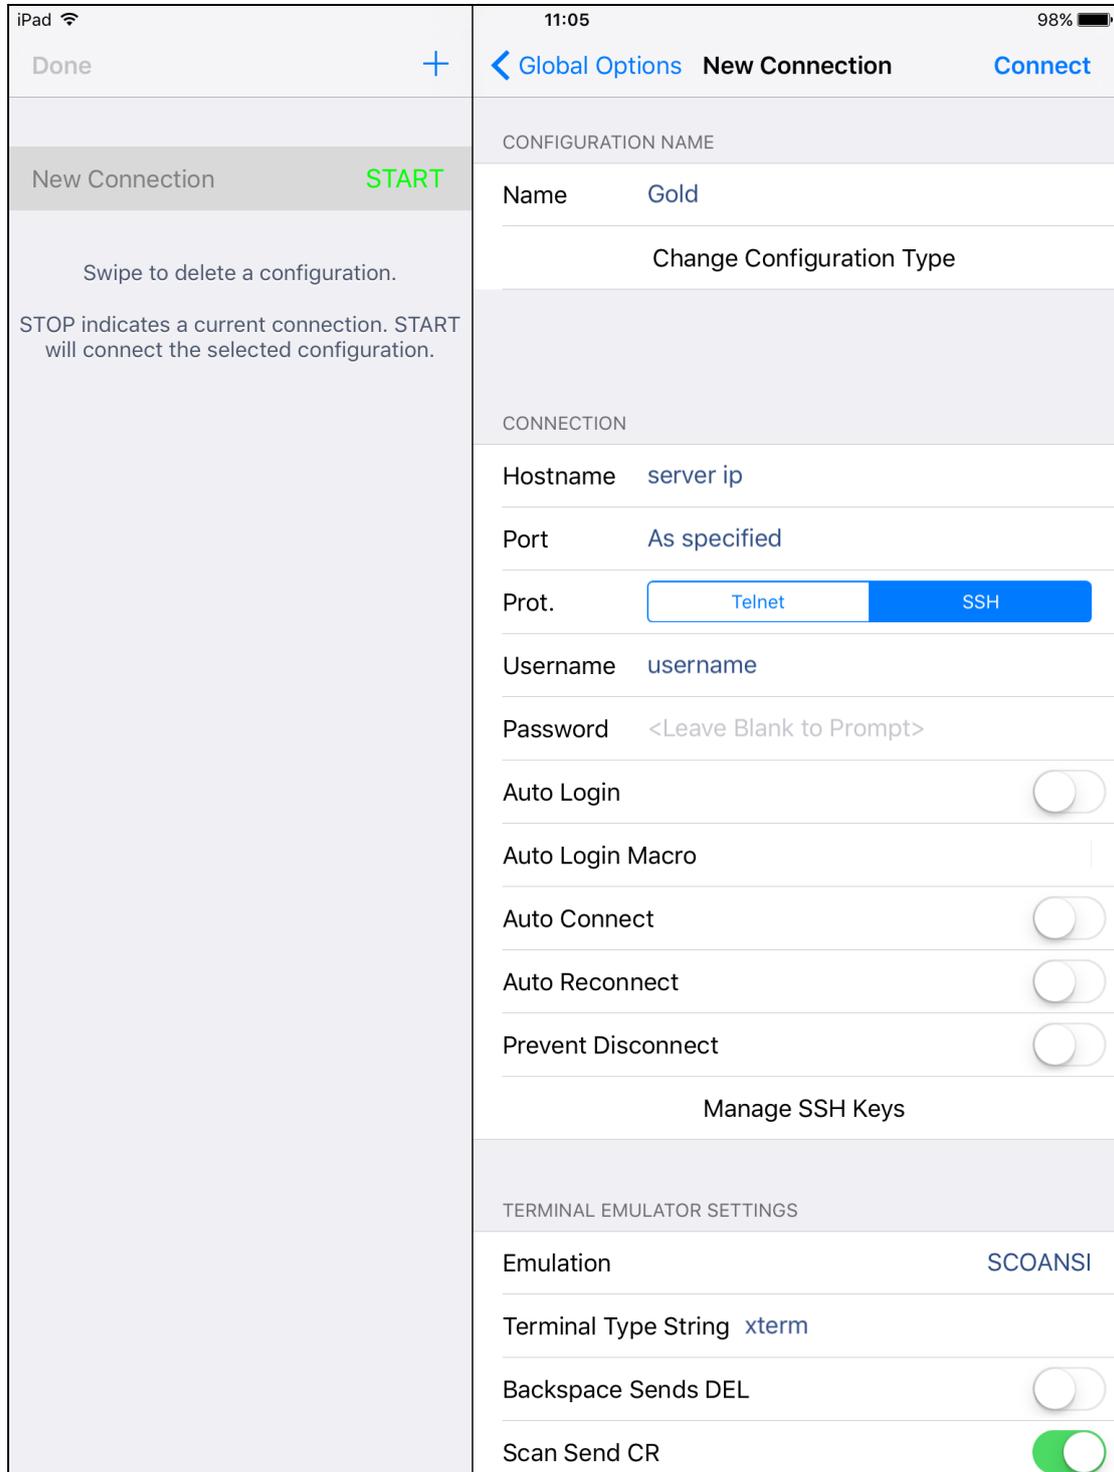

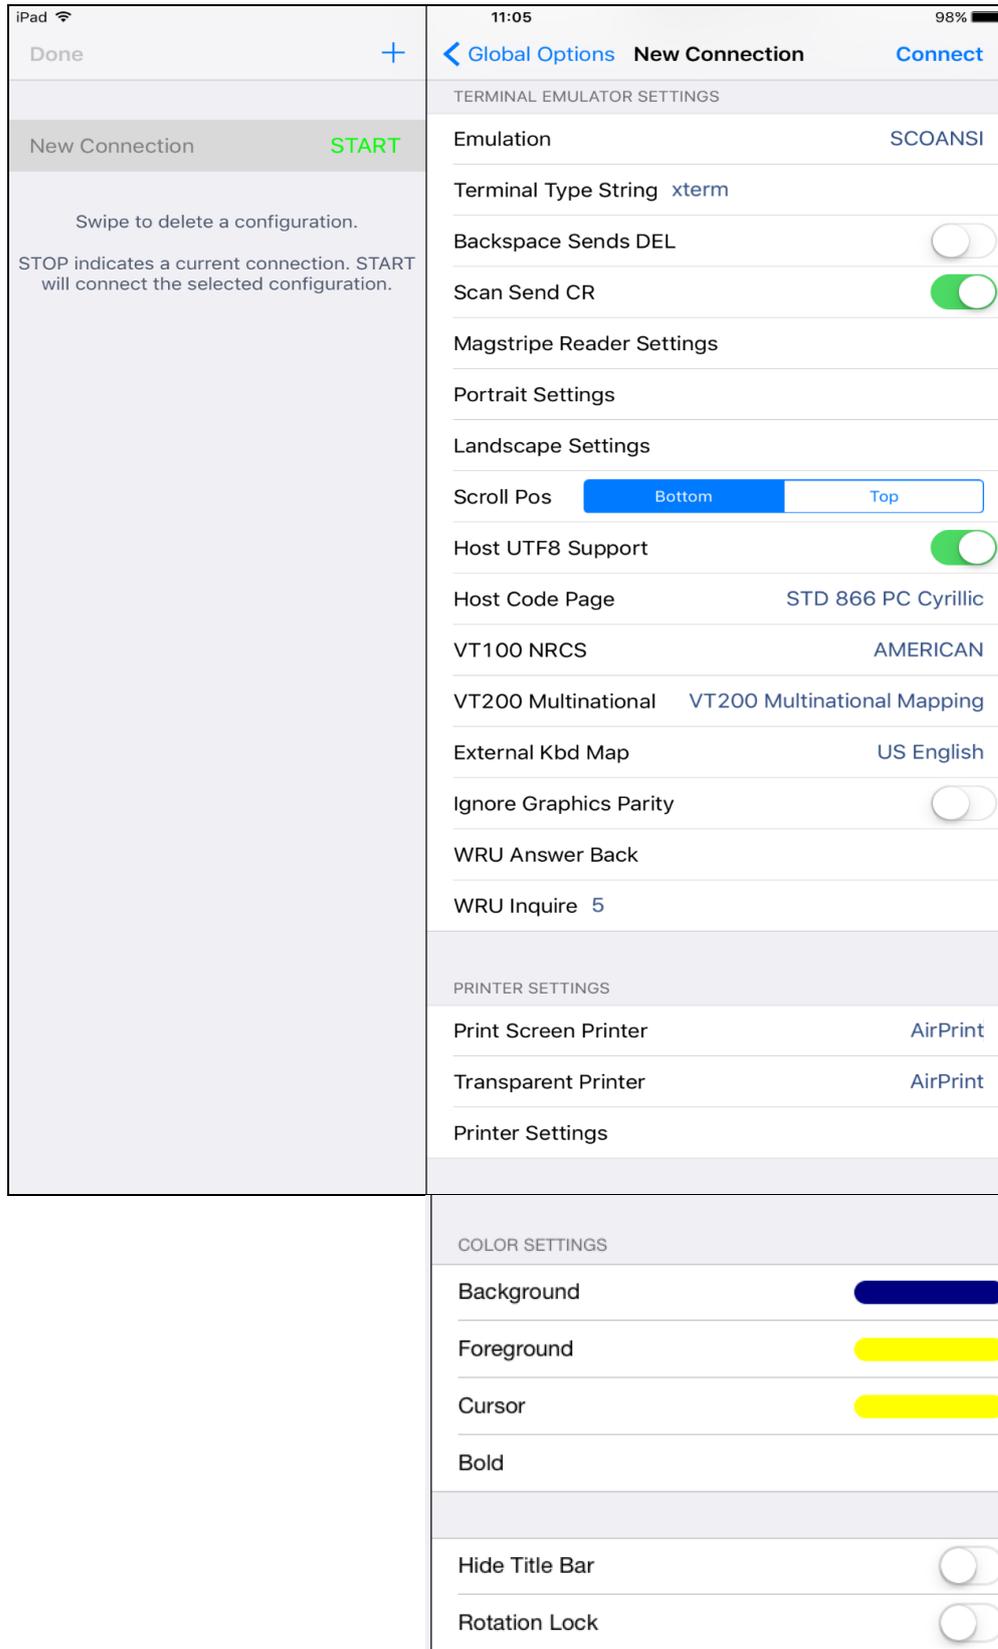

Configuration Settings → Portrait Settings

